

623 Receptacle angled rotatable

speedtec - ready
 9-pin
 insulation insert uncoded
 housing code 1
 flange mount / Flange 25x25
 Anti-vibration o-ring

A ED C 066 NN 00 00 1215 A00

Technical Data

number of pins 9
 temperature range -20 °C to 130 °C
 protection type when connected IP 66/67
 rotation range 330°

Electrical Data

rated current max. 10 A*
 rated voltage 160 V (AC/DC)
 rated insulation voltage (L-L) 2500 V

signal

max. 10 A*
 160 V (AC/DC)
 2500 V

mating cycles 500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree 3
 over voltage category III
 max. height for operation 2000 m

Material


housing zinc diecast / chromated
 insulation insert PBT, UL 94 / V0
 seals FKM

Contacts (not part of product contents)

Tools (not part of product contents)



Contact Arrangement
 mating view

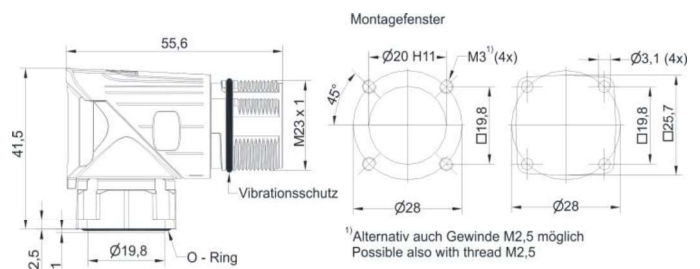

Copyright by Electro-Matic Integrated, INC.
 All rights, including rights created by patent grant or registration
 of a utility model or design, are reserved.
 Noncompliance will result in seeking damages.

This document is for information only and before utilization
 the user must reconfirm actuality.
 Subject to technical changes.

Electro-Matic Integrated, INC.
 23410 Industrial Park Court
 48335 Farmington Hills, MI
 USA
 E-Mail: ConnectivityEng@electro-matic.com
 Web: www.emintegrated.com

issue: 19.07.2020

Main Dimensions
 Receptacle angled rotatable

*for max. wire cross-section
 pay attention to the
 cross-section of used contacts