

# 623 Receptacle angled rotatable

**speedtec** - ready  
 12-pin  
 insulation insert uncoded  
 housing code 1  
 flange mount / Flange 25x25  
 Anti-vibration o-ring

## Technical Data

number of pins 12  
 temperature range -20 °C to 130 °C  
 protection type when connected IP 66/67  
 rotation range 330°

## Electrical Data

rated current max. 7 A\*  
 rated voltage 160 V (AC/DC)  
 rated insulation voltage (L-L) 2500 V

mating cycles 500

## Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree 3  
 over voltage category III  
 max. height for operation 2000 m

## Material

housing zinc diecast / chromated  
 insulation insert PBT, UL 94 / V0  
 seals FKM  
 contacts brass / gold plated

## Contacts

Item: 61.083.11  
 type Contact Pin ø1.0 mm  
 cross section crimp/ 0.03 - 0.34 mm<sup>2</sup>  
 contact resistance < 5 mOhm

## Tools (not part of product contents)

digital crimping tool for 0,6mm/1,0mm/1,5mm/2,0mm-contacts  
 Item: C0.235.00

analog crimping tool for 1 mm contacts  
 Item: C0.101.00

**A ED C 114 MR 83 00 1215 A00**



**Contact Arrangement**  
 mating view



**Contact Pin ø1.0 mm**  
 crimp/ 0.03 - 0.34 mm<sup>2</sup>  
 Item: 61.083.11




Copyright by Electro-Matic Integrated, INC.  
 All rights, including rights created by patent grant or registration  
 of a utility model or design, are reserved.  
 Noncompliance will result in seeking damages.

This document is for information only and before utilization  
 the user must reconfirm actuality.  
 Subject to technical changes.

Electro-Matic Integrated, INC.  
 23410 Industrial Park Court  
 48335 Farmington Hills, MI  
 USA  
 E-Mail: ConnectivityEng@electro-matic.com  
 Web: www.emintegrated.com

issue: 19.07.2020

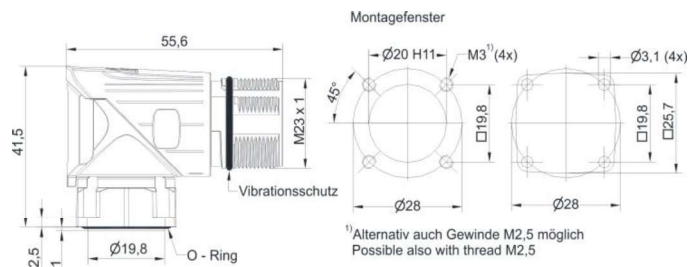

**Main Dimensions**  
 Receptacle angled rotatable

\*for max. wire cross-section  
 pay attention to the  
 cross-section of used contacts