

623 Receptacle angled rotatable

speedtec

**12-pin
insulation insert Code 20°
housing code 1
flange mount / Flange 25x25**

Technical Data

| | |
|-------------------|-------------------------|
| number of pins | 12 |
| temperature range | -20 °C to 130 °C |
| protection type | when connected IP 66/67 |
| rotation range | 330° |

Electrical Data

| | |
|--------------------------------|---------------|
| rated current | max. 7 A* |
| rated voltage | 160 V (AC/DC) |
| rated insulation voltage (L-L) | 2500 V |

signal

max. 7 A*
160 V (AC/DC)
2500 V

| | |
|---------------|-----|
| mating cycles | 500 |
|---------------|-----|

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

| | |
|---------------------------|--------|
| pollution degree | 3 |
| over voltage category | III |
| max. height for operation | 2000 m |

Material

| | |
|-------------------|--------------------------|
| housing | zinc diecast / chromated |
| insulation insert | PBT, UL 94 / V0 |
| seals | FKM |


Contacts (not part of product contents)

Tools (not part of product contents)

A ED C 138 NN 00 00 1115 A00



Contact Arrangement
mating view

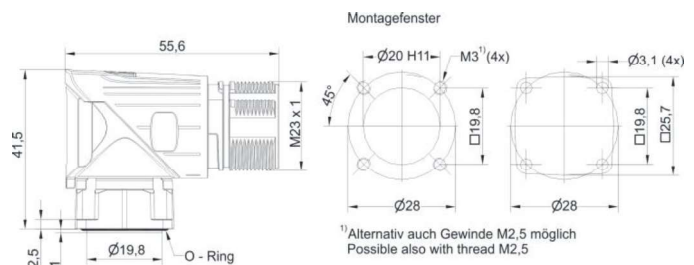

Copyright by Electro-Matic Integrated, INC.
All rights, including rights created by patent grant or registration
of a utility model or design, are reserved.
Noncompliance will result in seeking damages.

This document is for information only and before utilization
the user must reconfirm actuality.
Subject to technical changes.

Electro-Matic Integrated, INC.
23410 Industrial Park Court
48335 Farmington Hills, MI
USA

E-Mail: ConnectivityEng@electro-matic.com
Web: www.emintegrated.com

*for max. wire cross-section
pay attention to the
cross-section of used contacts

Main Dimensions
Receptacle angled rotatable