

7-pin  
 insulation insert Code 0°  
 housing code 1  
 flange mount / Flange 25x25

### Technical Data

number of pins 7  
 temperature range -20 °C to 130 °C  
 protection type when connected IP 66/67

### Electrical Data

rated current max. 20 A\*  
 rated voltage 32 V (AC/DC)  
 rated insulation voltage (L-L) 1500 V

### signal

mating cycles 500

### Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree 3  
 over voltage category III  
 max. height for operation 2000 m

### Material

housing zinc diecast / nickel plated  
 insulation insert PBT, UL 94 / V0  
 seals FKM

**Contacts** (not part of product contents)

**Tools** (not part of product contents)

**A DF A 157 NN 00 00 0151 A00**



**Contact Arrangement**  
 mating view




Copyright by Electro-Matic Integrated, INC.  
 All rights, including rights created by patent grant or registration  
 of a utility model or design, are reserved.  
 Noncompliance will result in seeking damages.

This document is for information only and before utilization  
 the user must reconfirm actuality.  
 Subject to technical changes.

Electro-Matic Integrated, INC.  
 23410 Industrial Park Court  
 48335 Farmington Hills, MI  
 USA

E-Mail: ConnectivityEng@electro-matic.com  
 Web: www.emintegrated.com

issue: 19.07.2020

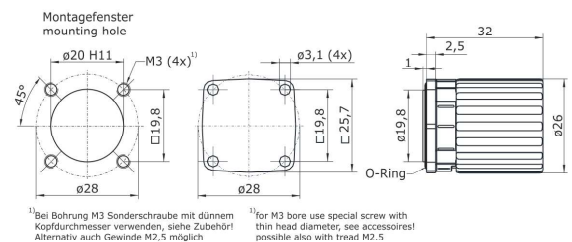

**Main Dimensions**  
 Bulkhead connector

\*for max. wire cross-section  
 pay attention to the  
 cross-section of used contacts