

**speedtec** - ready

12-pin

insulation insert Code 0°

housing code 1

EMV - shielding

central mount /lock nut M25x1.5 fixed end stop

### Technical Data

number of pins 12  
 temperature range -20 °C to 130 °C  
 clamping range Ø 6,0 mm to Ø 10,0 mm  
 protection type when connected IP 66/67

### Electrical Data

rated current  
 rated voltage  
 rated insulation voltage (L-L)

### signal

max. 7 A\*  
 160 V (AC/DC)  
 2500 V

mating cycles 500

### Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree 3  
 over voltage category III  
 max. height for operation 2000 m

### Material

housing zinc diecast / nickel plated  
 insulation insert PBT, UL 94 / V0  
 seals FKM  
 clamp ring brass / nickel plated

**Contacts** (not part of product contents)

**Tools** (not part of product contents)

**A KU A 012 NN 00 41 0203 A00**




**Contact Arrangement**  
 mating view



Copyright by Electro-Matic Integrated, INC.  
 All rights, including rights created by patent grant or registration  
 of a utility model or design, are reserved.  
 Noncompliance will result in seeking damages.

This document is for information only and before utilization  
 the user must reconfirm actuality.  
 Subject to technical changes.

Electro-Matic Integrated, INC.  
 23410 Industrial Park Court  
 48335 Farmington Hills, MI  
 USA  
 E-Mail: ConnectivityEng@electro-matic.com  
 Web: www.emintegrated.com

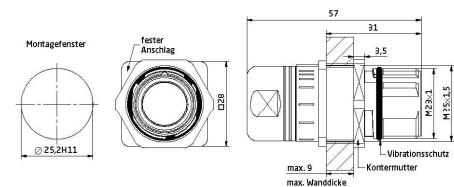

**Main Dimensions**  
 Extension

\*for max. wire cross-section  
 pay attention to the  
 cross-section of used contacts