

speedtec - ready

17-pin
insulation insert uncoded
housing code 1
EMV - shielding

central mount /lock nut M25x1.5 fixed end stop

Technical Data

number of pins 17
 temperature range -20 °C to 130 °C
 clamping range Ø 9.0 mm to Ø 13.2 mm
 protection type when connected IP 66/67

Electrical Data

rated current
 rated voltage
 rated insulation voltage (L-L)

signal

max. 7 A*
 125 V (AC/DC)
 2000 V

mating cycles 500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree 3
 over voltage category III
 max. height for operation 2000 m

Material

housing zinc diecast / nickel plated
 insulation insert PBT, UL 94 / V0
 seals FKM
 clamp ring brass / nickel plated

Contacts (not part of product contents)

Tools (not part of product contents)

A KU A 034 NN 00 61 0203 A00




Contact Arrangement
 mating view



Copyright by Electro-Matic Integrated, INC.
 All rights, including rights created by patent grant or registration
 of a utility model or design, are reserved.
 Noncompliance will result in seeking damages.

This document is for information only and before utilization
 the user must reconfirm actuality,
 Subject to technical changes.

Electro-Matic Integrated, INC.
 23410 Industrial Park Court
 48335 Farmington Hills, MI
 USA
 E-Mail: ConnectivityEng@electro-matic.com
 Web: www.emintegrated.com

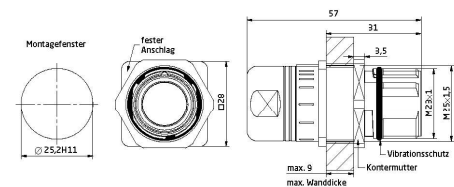

Main Dimensions
 Extension

*for max. wire cross-section
 pay attention to the
 cross-section of used contacts