

623 Receptacle

speedtec - ready
17-pin
insulation insert uncoded
housing code 1
flange mount / Flange 25x25
Anti-vibration o-ring

Technical Data

number of pins 17
 temperature range -20 °C to 130 °C
 protection type when connected IP 66/67

Electrical Data

rated current max. 7 A*
 rated voltage 125 V (AC/DC)
 rated insulation voltage (L-L) 2000 V

mating cycles 500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree 3
 over voltage category III
 max. height for operation 2000 m

Material

housing zinc diecast / nickel plated
 insulation insert PBT, UL 94 / V0
 seals FKM

Contacts (not part of product contents)

Tools (not part of product contents)

A EG A 113 NN 00 00 0201 A00



Contact Arrangement
mating view




Copyright by Electro-Matic Integrated, INC.
 All rights, including rights created by patent grant or registration of a utility model or design, are reserved.
 Noncompliance will result in seeking damages.

This document is for information only and before utilization the user must reconfirm actuality.
 Subject to technical changes.

Electro-Matic Integrated, INC.
 23410 Industrial Park Court
 48335 Farmington Hills, MI
 USA
 E-Mail: ConnectivityEng@electro-matic.com
 Web: www.emintegrated.com

issue: 22.07.2020

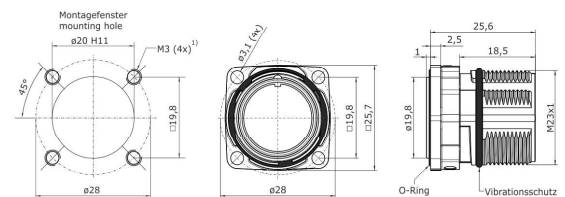

¹⁾ Bei Bohrung M3 Sonderschraube mit dünnem Kopfdurchmesser verwenden, siehe Zubehör! Alternativ auch Gewinde M2,5 möglich

¹⁾ for M3 bore use special screw with thin head diameter, see accessories! possible also with tread M2.5

Main Dimensions
Receptacle

*for max. wire cross-section
 pay attention to the
 cross-section of used contacts