

Technical Data

number of pins	6
power	6 (3+PE+2)
temperature range	-20 °C to 130 °C
protection type	when connected IP 66/67

Electrical Data

rated current	power max. 30 A*
rated voltage	630V (AC/DC)
rated insulation voltage (L-L)	6000 V

mating cycles	500
---------------	-----

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree	3
over voltage category	III
max. height for operation	2000 m

Material

housing	zinc diecast / nickel plated
insulation insert	PA 6.6 mod., UL 94/V0
seals	FKM
contacts	brass / gold plated

Contacts

Item:	60.254.11
type	Contact Socket 2.0 mm
cross section	crimp/ 0.35 - 2.50 mm ²
contact resistance	< 3 mOhm

Tools (not part of product contents)

analog crimping tool for 1 mm-/2 mm- contacts
Item: C0.201.00

digital crimping tool for 1mm-/2 mm- contacts
Item: C0.236.00

positioning insert for ø2mm contacts
Item: C0.004.00

B DF A 107 FR 54 00 0050 A00




Contact Arrangement

mating view



Contact Socket 2.0 mm

crimp/ 0.35 - 2.50 mm²
Item: 60.254.11

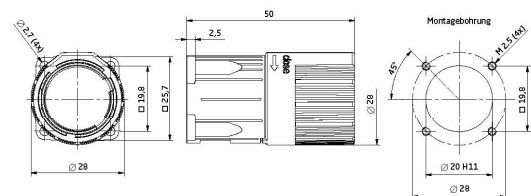

Main Dimensions

Bulkhead connector

*for max. wire cross-section
pay attention to the
cross-section of used contacts

Copyright by Electro-Matic Integrated, INC.
All rights, including rights created by patent grant or registration
of a utility model or design, are reserved.
Noncompliance will result in seeking damages.

This document is for information only and before utilization
the user must reconfirm actuality.
Subject to technical changes.

Electro-Matic Integrated, INC.
23410 Industrial Park Court
48335 Farmington Hills, MI
USA

E-Mail: ConnectivityEng@electro-matic.com
Web: www.emintegrated.com