

923 Receptacle

speedtec - ready

6-pin
Earth-to-Housing Connection according to VDE 0627
thread mount / mounting thread M20x1.5
Anti-vibration o-ring

Technical Data

number of pins	6
power	6 (3+PE+2)
temperature range	-20 °C to 130 °C
protection type	when connected IP 66/67

Electrical Data

rated current	power
rated voltage	max. 30 A*
rated insulation voltage (L-L)	630V (AC/DC)
	6000 V

mating cycles 500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree	3
over voltage category	III
max. height for operation	2000 m

Material

housing	zinc diecast / nickel plated
insulation insert	PA 6.6 mod., UL 94/V0
seals	FKM

Contacts (not part of product contents)

Tools (not part of product contents)

B EG A 088 NN 00 00 0222 A00



Contact Arrangement
mating view




Copyright by Electro-Matic Integrated, INC.
 All rights, including rights created by patent grant or registration
 of a utility model or design, are reserved.
 Noncompliance will result in seeking damages.

This document is for information only and before utilization
 the user must reconfirm actuality.
 Subject to technical changes.

Electro-Matic Integrated, INC.
 23410 Industrial Park Court
 48335 Farmington Hills, MI
 USA
 E-Mail: ConnectivityEng@electro-matic.com
 Web: www.emintegrated.com

issue: 06.04.2020

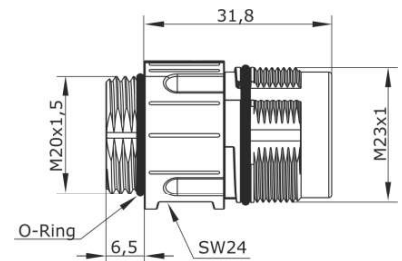

Main Dimensions
Receptacle

*for max. wire cross-section
 pay attention to the
 cross-section of used contacts