

speedtec - ready

8-pin
Earth-to-Housing Connection according to VDE 0627
flange mount / Flange 40x40
Anti-vibration o-ring

Technical Data

number of pins	8
power	4 (3+PE)
signal	4
temperature range	-20 °C to 130 °C
protection type	when connected IP 66/67

Electrical Data

	power	signal
rated current	max. 75 A*	max. 30 A*
rated voltage	630V (AC/DC)	250 V (AC/DC)
rated insulation voltage (L-L)	6000 V	4000 V

mating cycles 500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree	3
over voltage category	III
max. height for operation	2000 m

Material

housing	zinc diecast / nickel plated
insulation insert	PA 6.6 mod., UL 94/V0
seals	FKM

Contacts (not part of product contents)

Tools (not part of product contents)

C EG A 271 NN 00 00 0051 A00



Contact Arrangement
 mating view




Copyright by Electro-Matic Integrated, INC.
 All rights, including rights created by patent grant or registration
 of a utility model or design, are reserved.
 Noncompliance will result in seeking damages.

This document is for information only and before utilization
 the user must reconfirm actuality.
 Subject to technical changes,

Electro-Matic Integrated, INC.
 23410 Industrial Park Court
 48335 Farmington Hills, MI
 USA
 E-Mail: ConnectivityEng@electro-matic.com
 Web: www.emintegrated.com

issue: 04.08.2020

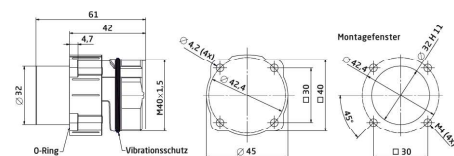

Main Dimensions
 Receptacle

*for max. wire cross-section
 pay attention to the
 cross-section of used contacts