

8-pin
 Earth-to-Housing Connection according to VDE 0627
 flange mount / Flange 56x56

Technical Data

number of pins	8
power	4 (3+PE)
signal	4
temperature range	-20 °C to 130 °C
protection type	when connected IP 66/67

Electrical Data

	power	signal
rated current	max. 150 A*	max. 12 A*
rated voltage	630V (AC/DC)	250 V (AC/DC)
rated insulation voltage (L-L)	6000 V	4000 V

mating cycles	500
---------------	-----

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree	3
over voltage category	III
max. height for operation	2000 m

Material

housing	zinc diecast / nickel plated
insulation insert	PBT, UL 94 / V0
seals	FKM
contacts	brass / silver plated
contacts	brass / gold plated

Contacts

Item:	61.113.23
type	Contact Pin ø10,0 mm
cross section	crimp/ 16.00mm ²
contact resistance	< 90 µOhm

Item:	61.117.11
type	Contact Pin ø1.6 mm
cross section	crimp/ 0.35 - 1.50 mm ²
contact resistance	< 5 mOhm

Tools (not part of product contents)

Battery crimp tool
 Item: C0.207.00

Crimping Inserts
 Item: C0.211.00

analog crimping tool for 1 mm-/2 mm- contacts
 Item: C0.201.00

D EG A 003 MR 07 00 0001 A00



Contact Arrangement

mating view



Contact Pin ø10.0 mm
 crimp/ 16.00mm²
 Item: 61.113.23



Contact Pin ø1.6 mm
 crimp/ 0.35 - 1.50 mm²
 Item: 61.117.11




Copyright by Electro-Matic Integrated, INC.
 All rights, including rights created by patent grant or registration
 of a utility model or design, are reserved.
 Noncompliance will result in seeking damages.

This document is for information only and before utilization
 the user must reconfirm actuality.
 Subject to technical changes.

Electro-Matic Integrated, INC.
 23410 Industrial Park Court
 48335 Farmington Hills, MI
 USA
 E-Mail: ConnectivityEng@electro-matic.com
 Web: www.emintegrated.com

issue: 05.08.2020

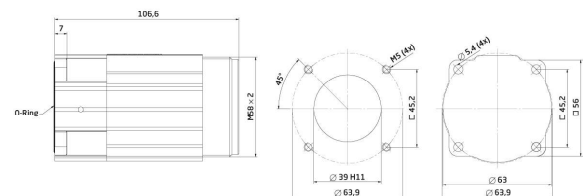

Main Dimensions

Receptacle

*for max. wire cross-section
 pay attention to the
 cross-section of used contacts